


M12 Aktor- / Sensor- Box, Steckplätze 4 M12 actuator- / sensor- box, ports 4

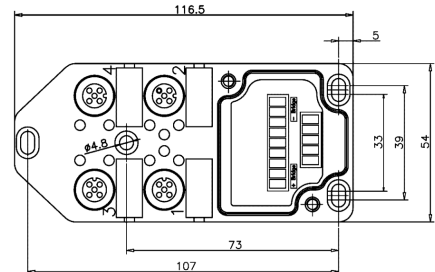

M12 - Steckplätze	4	M12 - ports	4
Polzahl	5	number of contacts	5
Nennspannung	10V – 30V DC	rated voltage	10V – 30V DC
Dauerstrom	4A	operating current	4A
Statusanzeige	LED	protection indicator	LED
Schutzart	IP67	protection class	IP67
Gehäusematerial	PA	housing material	PA
Kontaktmaterial	Cu Sn / Au / Ni	contact material	Cu Sn / Au / Ni
Temperaturbereich	-15°C bis +80°C	temperature range	-15°C up to +80°C
frei konfektionierbarer LINK Steckverbinder		field attachable LINK prot	

weitere Optionen und Zubehör auf Anfrage
more options and accessories on request